

6



MORE LIGHT

## LED Emitter | 650 nm | AlInGaP/GaAs | PCB ELP-650-992-080-2

Prototype

Pat. US 8847241 B2

### Features

- 80  $\mu\text{m}$  Point Source on PCB
- Radiation 650 nm (Red)
- High Efficiency
- Long Lifetime
- Designed for Minimum Parasitic Light

### Applications

- Industrial, Scientific and Medical Systems
- Safety and Security

Lead (Pb) Free Product – RoHS Compliant

## ELP-650-992-080-2 | 650 nm | Prototype Parameters

| Measurement Conditions | Symbol            | Value | Unit |
|------------------------|-------------------|-------|------|
| Measurement Current    | $I_{\text{Meas}}$ | 10    | mA   |
| Ambient Temperature    | $T_{\text{amb}}$  | +25   | °C   |

These conditions apply for all parameters below, unless otherwise specified

All parameters are measured with Jenoptik equipment





| Maximum Ratings             | Symbol           | Value       | Unit |
|-----------------------------|------------------|-------------|------|
| Forward Current (DC)        | $I_{\text{F}}$   | 15          | mA   |
| Junction Temperature        | $T_{\text{J}}$   | +125        | °C   |
| Operating Temperature Range | $T_{\text{amb}}$ | -40 to +85  | °C   |
| Storage Temperature Range   | $T_{\text{stg}}$ | -40 to +125 | °C   |

| Optical / Electrical Characteristics <sup>1</sup> | Test conditions  |                   | Symbol                | Min | Typ  | Max | Unit                    |
|---|------------------|-------------------|-----------------------|-----|------|-----|-------------------------|
| Forward Voltage                                   | $I_{\text{F}} =$ | 10 mA             | $V_{\text{F}}$        |     | 1.85 | 2.5 | V                       |
| Reverse Voltage                                   | $I_{\text{F}} =$ | 10 $\mu\text{A}$  | $V_{\text{R}}$        | 5   |      |     | V                       |
| Radiant Power                                     | $I_{\text{F}} =$ | 10 mA             | $\Phi_{\text{e}}$     |     | 350  |     | $\mu\text{W}$           |
| Radiant Intensity                                 | $I_{\text{F}} =$ | 10 mA             | $I_{\text{e}}$        |     | 160  |     | $\mu\text{W}/\text{sr}$ |
| Luminous Intensity                                | $I_{\text{F}} =$ | 10 mA             | $I_{\text{v}}$        |     | 15   |     | mcd                     |
| Peak Wavelength                                   | $I_{\text{F}} =$ | $I_{\text{Meas}}$ | $\lambda_{\text{p}}$  |     | 650  |     | nm                      |
| Centroid Wavelength <sup>2</sup>                  | $I_{\text{F}} =$ | $I_{\text{Meas}}$ | $\lambda_{\text{c}}$  | 635 | 650  | 660 | nm                      |
| Spectral Bandwidth at 50%                         | $I_{\text{F}} =$ | $I_{\text{Meas}}$ | $\Delta\lambda_{0.5}$ |     | 15   |     | nm                      |
| Emitting Point Diameter                           |                  |                   | D                     |     | 80   |     | $\mu\text{m}$           |

<sup>1</sup>  $T_{\text{amb}} = 25^{\circ}\text{C}$ , unless otherwise specified; all parameters are measured with Jenoptik equipment  
<sup>2</sup> measured on bare chip




ELP-650-992-080-2 | 650 nm | Prototype  
Parameters

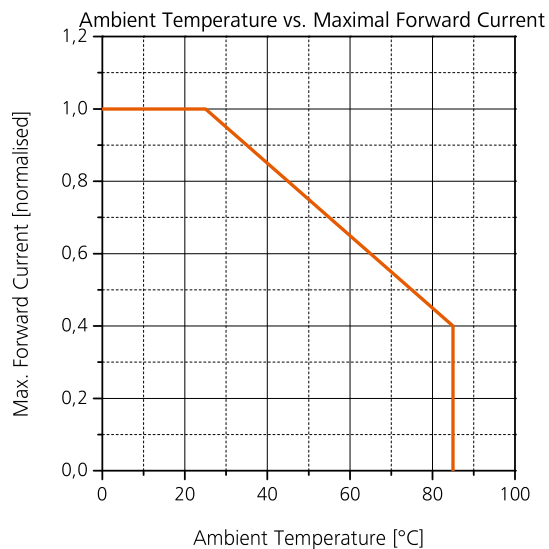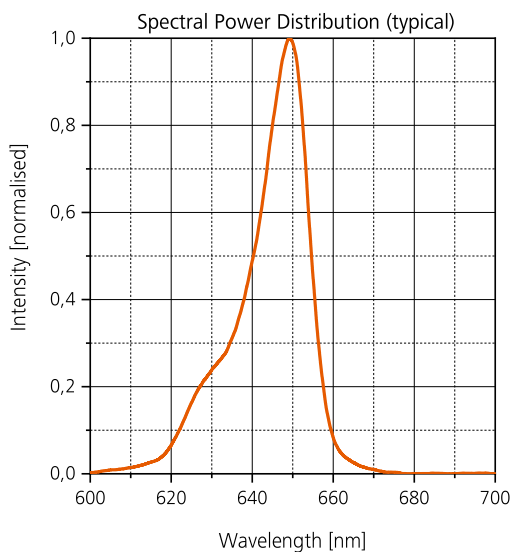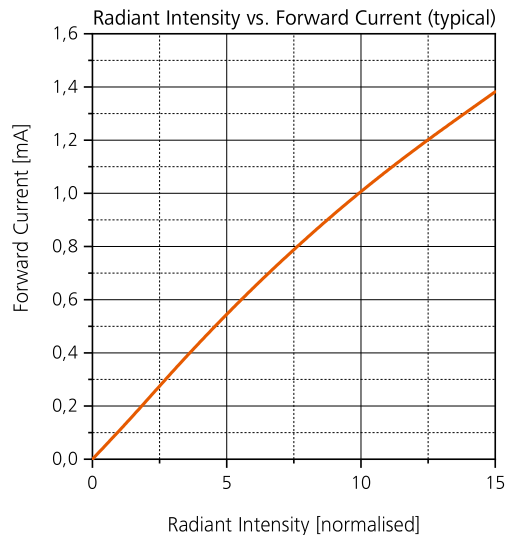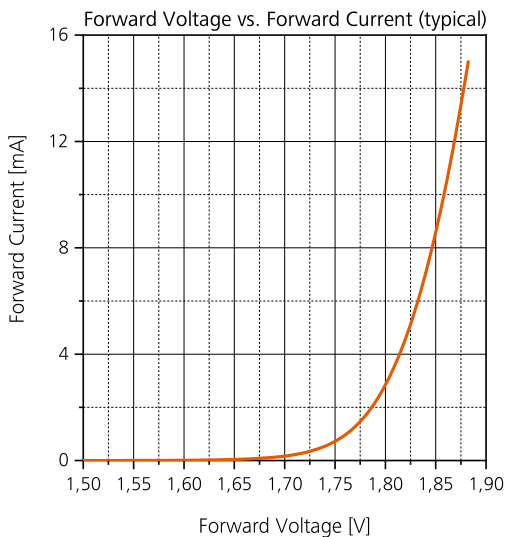


ELP-650-992-080-2 | 650 nm | Prototype  
 Mechanical Dimensions

Module

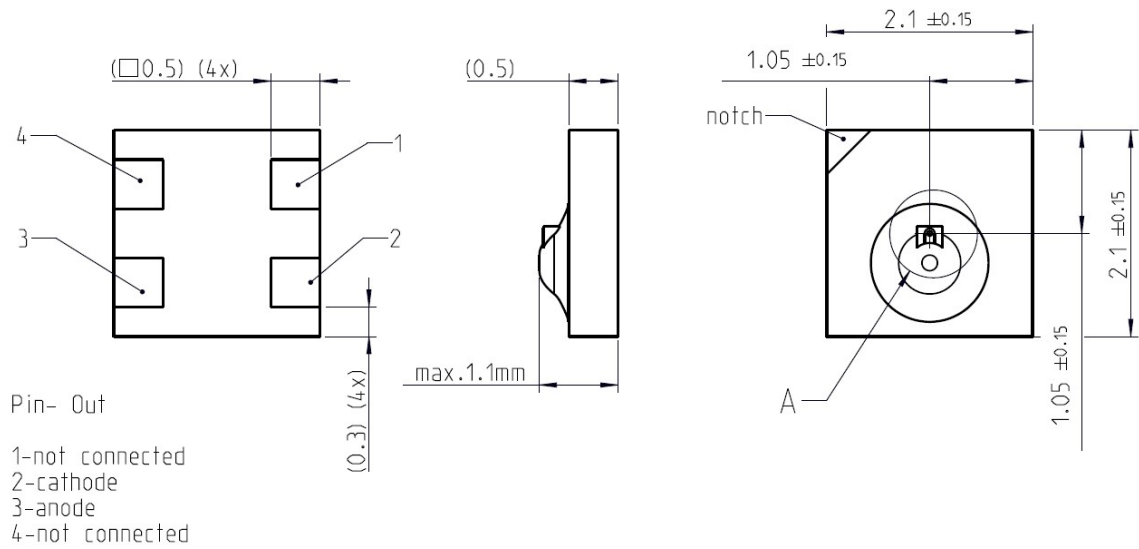

potting can vary in height and footprint dimensions in mm


Emitting Area

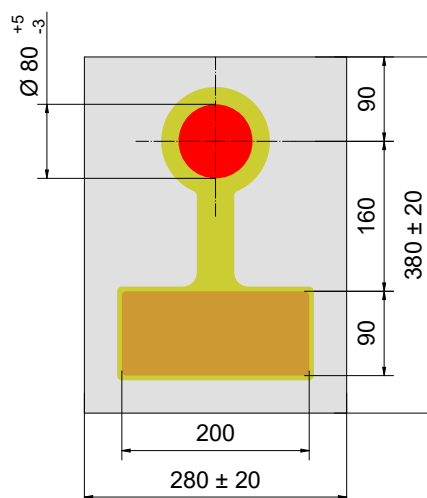

dimensions specified in  $\mu\text{m}$




ELP-650-992-080-2 | 650 nm | Prototype  
Soldering Conditions

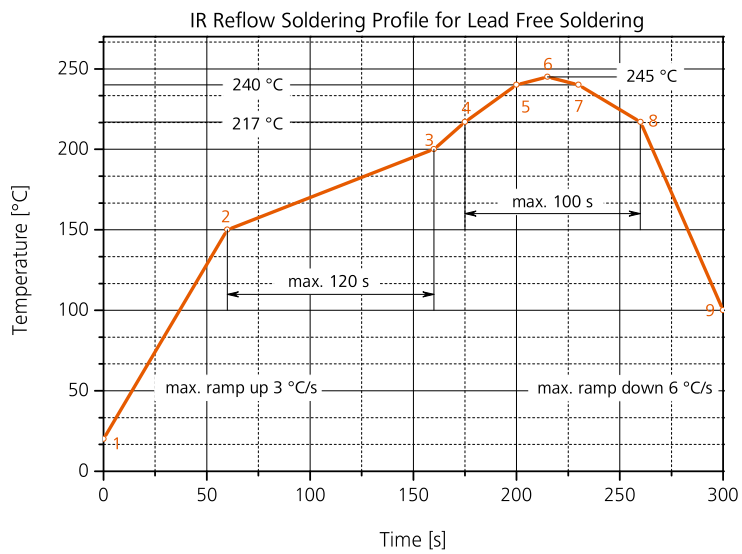

according to JEDEC J-STD-020D




Recommended Solder Pad

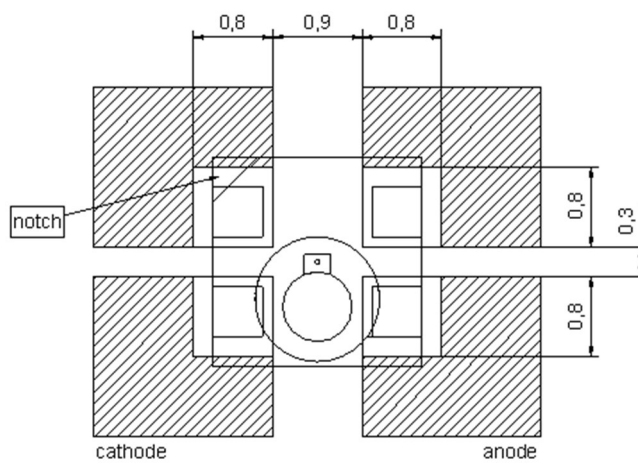

dimensions specified in mm




Dimensions conform to IEC 60286-3, EIA 481-D

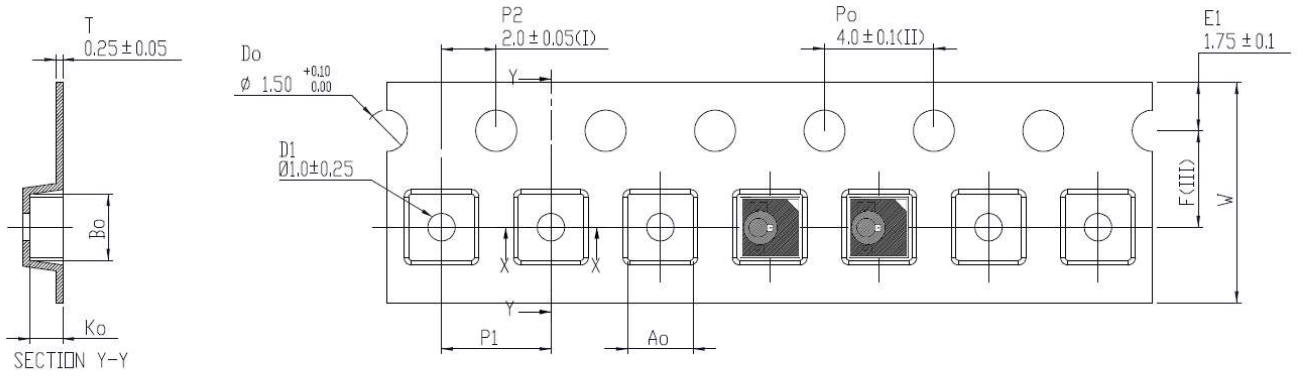

|    |      |           |
|----|------|-----------|
| Ao | 2,40 | +/- 0,1   |
| Bo | 2,40 | +/- 0,1   |
| Ko | 1,20 | +/- 0,1   |
| F  | 3,50 | +/- 0,05  |
| P1 | 4,00 | +/- 0,1   |
| W  | 8,00 | +0,3/-0,1 |

- (I) Measured from centreline of sprocket hole to centreline of pocket.
- (II) Cumulative tolerance of 10 sprocket holes is  $\pm 0,20$ .
- (III) Measured from centreline of sprocket hole to centreline of pocket.

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.

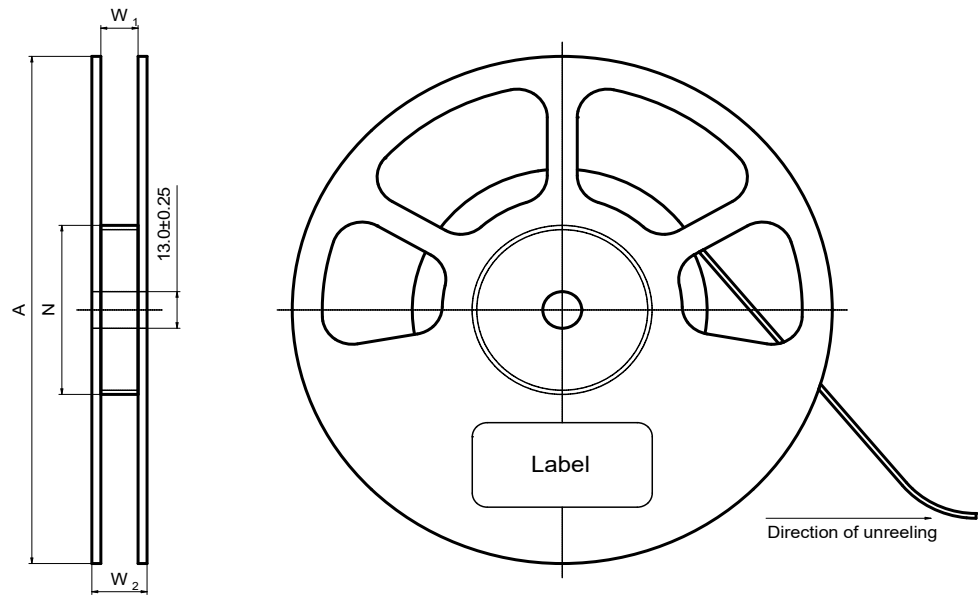

|                |      |
|----------------|------|
| A              | 180  |
| N              | 60   |
| W <sub>1</sub> | 8.4  |
| W <sub>2</sub> | 14.4 |

Leader: min.400  
Trailer: min.160  
All dimensions in mm unless otherwise stated




ELP-650-992-080-2 | 650 nm | PCB  
Packing

Devices packaged according to IPC/JEDEC J-STD-033 with moisture classification level 3.


| Storage on Carrier Tape   |     | Symbol            | Min | Max | Unit |
|---------------------------|-----|-------------------|-----|-----|------|
| Storage Temperature       | Air | T <sub>STG</sub>  | 15  | 40  | °C   |
| Storage Relative Humidity | Air | RH <sub>STG</sub> |     | 70  | % RH |
| Storage Time              | Air | t <sub>STG</sub>  |     | 1   | year |

| Labeling     |                               |
|--------------|-------------------------------|
| Manufacturer | Jenoptik Optical Systems GmbH |
| Type         | ELP-650-992-080-2             |
| Item N°      | 671123                        |
| Charge       | XXXXXX                        |
| Date         | dd.mm.yyyy                    |
| Quantity     | XXXX pcs.                     |


**JENOPTIK Optical Systems GmbH**  
Type: ELP-650-992-080-2




Item No.: 671123




Charge: 1714027-026-025




Date: 25.04.2017



Quantity: 3000



Trace-Code: 1310163501  
0603#17.10002-6





### Attention

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

For further information, please contact our sales department.

### Handling

Emission area of the chip is not protected against dust.

Please handle module in clean environment only.

LEDs have to be handled ESD sensitive.



### Safety Advice\*

The evaluation of eye safety occurs according to the standard CIE/IEC 62471:2006 ("Photobiological Safety of Lamps and Lamp Systems"). Within the risk grouping system of this CIE standard the LED in this data sheet is assigned into the **Group 1 – Low Risk**.

\*Note: Safety classification of an optical component mainly depends on the intended application and the way the component is being used. Furthermore, all statements made to classification are based on calculations and are only valid for this LED "as it is", and at continuous operation, assuming direct view and maximum forward current. Using pulsed current or altering the light beam with additional optics may lead to different safety classifications. Therefore, these remarks should be taken as recommendation and guideline only.